

The Perfect Fit Boost Sales



Flexible Configuration

The FreshWay V's modular design supports many different configurations for a range of retail applications and environments. The weighing platter and display screens can be positioned completely separately, enabling custom setup for various counter heights and orientations.



Ergonomic Operation

Employees can adjust the height and tilt angle (up to 30°) of the FreshWay V's touchscreen display to suit their individual requirements. This ensures ergonomic operation as well as fast, error-free weighing processes.



Robust Housing

Impact-resistant aluminum housing enables years of worry-free use. The flat weighing platform is quick to remove and easy to clean, maximizing hygiene and making it ideal for even the most demanding retail environments.



Intuitive Software

The user interface of the FreshWay V offers simplified operation with its familiar FreshPro GUI that is user-friendly for both new employees and experienced operators. Less training time means lower costs and more time for high-quality customer service.



FreshWay V

The modular design of the FreshWay V scale features individual, freely-positionable components for configuration to a variety of retail counter setups. Retailers benefit from this high degree of flexibility when modifying service counters to sales requirements.

The versatile, innovative design of the FreshWay V permanently reduces the risk of high follow-up setup costs and ensures adaptability for any changing future needs and requirements.

Technical Data

FreshWay V

Operator Touchscreen Display

- 15.6" (39.6 cm) capacitive touchscreen with a bright, high-contrast TFT LED backlit display
 - Screen resolution: 1366 x 768 pixels
- Continuous tilt angle adjustments (stepless)
- Optional 12.1" (30.7 cm) display available
 - Screen resolution: 1024 x 768 pixels
- Cable length: 1.4 m; optional 2 m, 4 m

Customer Display (Optional)

- 15.6" (39.6 cm) customer display with a bright, high-contrast TFT LED backlit display
 - Screen resolution: 1366 x 768 pixels
- 12.1" (30.7 cm) customer display with bright, high-contrast LED backlight technology
 - Screen resolution: 1024 x 768 pixels
- Cable length: 1.4 m; optional 2 m, 4 m

Printers

- Printing width: 2.2" (56 mm)
- Paper width: 1.7 – 2.4" (44 – 62 mm)
- Printing speed: up to 5.9"/sec (150 mm/sec)
- Print resolution: 8 dots/mm
- Separate paper feed button
- Pole-mounted printer options:
 - 2-inch (50.8 mm) ticket printer
 - 2-inch (50.8 mm) label printer
 - 2-inch (50.8 mm) linerless printer
 - 3-inch (76.2 mm) linerless printer
- Optional remote-mounted (up to 4 m) printers:
 - 3-inch (76.2 mm) label printer
 - 3-inch (76.2 mm) linerless printer
- Dual printer capability
- Cable length: 1.4 m; optional 2 m, 4 m

Processor

- Intel® Dual Core N3010 1.06 GHz processor (2.24 GHz in turbo mode)

Memory/Data Storage

- 4 GB DDR3 RAM
- 64 GB Flash Memory

Operating System

- Linux openSUSE Leap 15 64-bit
- Microsoft Windows® 10 IoT Enterprise 64-bit

Scale Software

- FreshPro application

Power Supply

- 100 – 240 V AC, 50 / 60 Hz

Average Power Consumption

- During operation: ca. 26 W

Interfaces and Protocols


- Gigabit Ethernet interface (10/100/1000)
- 1 x RJ11 interface for controlling the cash register drawer
- 2 x USB 2.0 ports
- 2 x USB 3.0 ports
- Integrated wireless solution for wireless data transmission in accordance with standard IEEE 802.11 ac/a/b/g/n (2T2R), with 2 x 2 MIMO

Housing

- Impact-resistant housing made of die-cast aluminum
- Seamless cover resistant to spills
- Color: Black

Weighing range	15 lb / 30 lb (6.8 kg / 13.7 kg)
Graduation	0.005 lb / 0.001 lb (0.002 kg / 0.0005 kg)
Minimum load	0.1 lb (0.05 kg)

Intel is a registered trademark of Intel Corporation in the U.S. and/or other countries. Microsoft® and Windows® are registered trademarks of Microsoft Corporation in the United States and/or other countries.

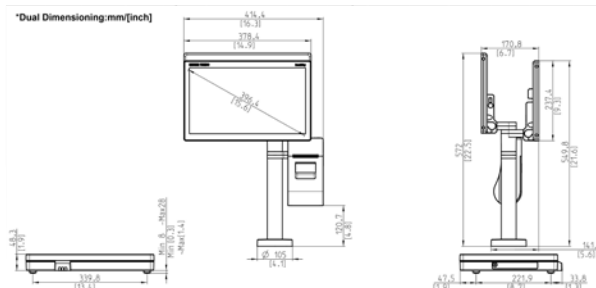

www.mt.com

For more information

METTLER TOLEDO Group

Retail Division

Local contact: www.mt.com/contacts

Subject to technical changes

©07/2021 METTLER TOLEDO. All rights reserved

Document No. 30536838 A

MarCom Industrial

