

# ALL ELECTRIC AUTOMATIC L-BAR SEALER

MODEL: HDX2000



## FEATURES

### CONTROLS

- All Electric, No Air Required
- Variable Speed AC Motors
- Plug and Play Set Up
- Swing Arm Control Panel, Operate Machine From Either Side
- Store Up to 64 Recipes, Add Your Own Photos
- Multi-level Password Protection
- Multiple Language
- USB Interface



HDX2000

### SEAL AREA

- 15.5" W x 23" L, One Piece Blade
- Motorized Movement of
  - Seal Jaw Opening and Height
  - Inverting Triangle Height
- Adjustable Seal Force
- Closing Conveyor
- Film Loosening
- Belt Reversing
- Seal Cooling for Polyethylene
- FDA Belts
- Scrap Rewind with Scrap Break and Scrap Full Alarms

### OTHER FEATURES

- Dual Gull Wing with Interlocked Guarding
- Audible and Visible Alarms
- Infeed and Outfeed Belts Extend Beyond Machine Opening
- Interlocked Slide Out Film Carriage
- Runs Most Polyolefin and Polyethylene Films
- Horizontal and Vertical Product Sensors
- Powder Coated Steel Construction
- Casters and Leveling Pads
- Two Year Limited Warranty



## MODEL SPECS

SEAL AREA	15.5" W, 23" L (400mm W, 600mm L)
FILM CAPACITY	27.5" W, 11.75"OD (700mm W, 300mm OD)
CONVEYOR SPEED	VARIABLE 20 – 100 FPM (6-30 mpm)
PRODUCTION RATE	0 – 45 PPM, Dependent upon product and film size
MAXIMUM PRODUCT DIMENSION	23.5" L, 15.5" W (600mm L, 400mmW, 240mmH) Maximum dimensions cannot be used simultaneously
POWER REQUIREMENTS	208-240 VAC, SINGLE PHASE, 10.5A
CONVEYOR HEIGHT	34.25" TO 36.25" (870mm TO 920mm)
OVERALL DIMENSIONS	100" L, 49" W, 62" H (2518mm L, 1240mm W, 1558mm H)
WEIGHT	1265 Lbs. (573 Kg)

## AVAILABLE OPTIONS

- Infeed and Outfeed Conveyors
- Printer
- Clear Product Sensor
- Printed Film Registration Sensor
- Electric Film Hole Punch
- Product Guides for Unstable Products



# SHRINK TUNNEL

MODEL: TX5218



## FEATURES

### TUNNEL CHAMBER

- Two Chamber Design with Dual Temperature Control
- Digital Temperature Adjustment with 9 Customized Program Settings
- Adjustable Air Flow
- High Temperature Safety Alarm
- Automatic Cool Down

### CONVEYOR FEATURES

- Digital Variable Speed
- Live/Dead Selection Roller Conveyor
- 3/8" (10mm) OD Roller on 1" (25mm) Pitch
- 20" (50cm) Roller Exit Conveyor



Model TX5218

### OTHER FEATURES

- One Year Limited Warranty
- Powder Coated Steel Construction
- Heavy Duty Locking Casters

## MODEL SPECS

INSIDE TUNNEL DIMENSIONS	52" L, 17.5" W, 8" H (134cm L, 45cm W, 21cm H)
CONVEYOR	Variable Speed, Quick Change, Live/Dead Rollers, 34" H (864mm)
POWER REQUIREMENTS	208-240 VAC, THREE PHASE 43A @208VAC, 50A @240VAC
WATTAGE	14 kW
OVERALL DIMENSIONS	64.5" L, 31.5" W, 57.5" H (163cm L, 80cm W, 146cm H)
WEIGHT	574 Lbs. (260 kg)

## AVAILABLE OPTIONS

- PTFE Mesh Overlay




# BELTED INFEED CONVEYOR



**MODEL: IC1572**

## FEATURES

- Seamless Control Integration with Heat Seal Automatic Sealers
- Variable Speed for Easy Product Placement
- Adjustable Height & Guide Rails
- Locking Casters and Levelers
- Two Year Warranty
- Stand-alone 115V Conveyor Available

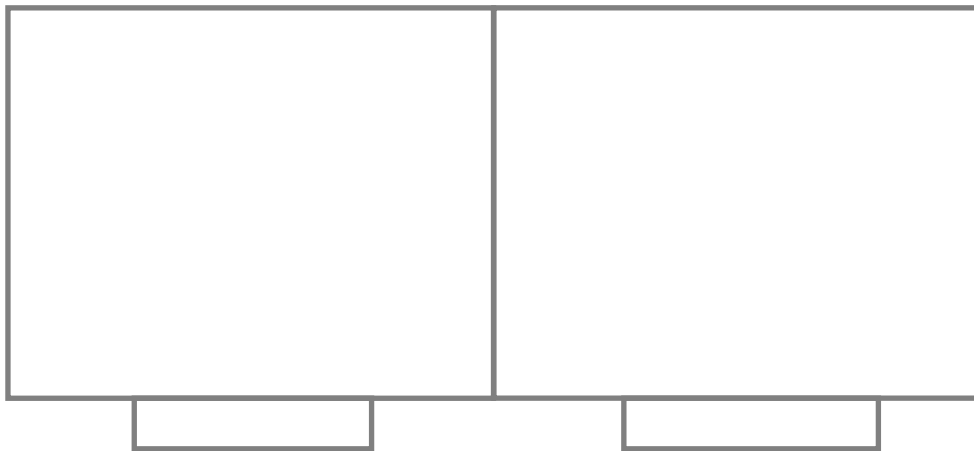

## MODEL SPECS

<b>CONVEYOR SIZE</b>	15" W x 72" L (38 cm x 183 cm)
<b>WORKING HEIGHT</b>	33"-36.5" (84cm - 93cm)
<b>OVERALL DIMENSIONS</b>	76" L, 26" W (193 cm L, 66 cm W)
<b>POWER REQUIREMENTS</b>	208-240VAC, 3A
<b>CONVEYOR SPEED</b>	0-78 ft/min (0-24 m/min)
<b>WEIGHT</b>	200 lbs. (90 kg)

