

Increase Productivity

Optimized Weighing and Labeling



Increased Throughput

With a throughput speed of 14-22 packages per minute, the 750 Semi-Automatic Wrapper is fast enough to keep up with steady sales activity. Operators benefit from automatic label application for repeatable, accurate label placement on all packages.



Quality Labeling

Retailers benefit from the optimal label placement produced by the 750's automatic label applicator. High-quality labels allow for customized design applications and food safety labeling compliance.



Cost Effective

The 750 Semi-Automatic Wrapper offers a cost effective alternative for grocery backrooms that do not require the high production speed of a fully automated wrapping system, while maintaining the same quality output.



Hygienic Design

The 750 Semi-Automatic Wrapper reduces both the time and the effort required for daily cleaning. Its open design allows for optimal hygiene and safety.



750 Semi-Automatic Wrapper

Automatic weighing and labeling

The 750 Semi-Automatic Wrapper provides a cost effective weigh, wrap and label solution for medium-volume retailers. The 750 keeps inventory flowing smoothly from the backroom to the sales floor with its fast automated weighing and labeling capabilities.

- Manual wrapping with 3-roll film capacity
- Intuitive user-interface with touchscreen controller
- Easy cleaning and open design
- Simple and fast loading of label and film rolls
- Consistent label placement for meat case uniformity

The Ideal Choice for Medium Volume Operations

The 750 Semi-Automatic Wrapper offers a manual wrap station with integrated automatic weigh and labeling functions. The 750 is poised to increase backroom productivity and improve meat case displays. A cost-effective solution for backrooms, the 750 is robust and user-friendly.



Technical data

750 Semi-Automatic Wrapper

Speed

Up to 22 packs-per-minute

Tray sizes

1S, 2S, 17S, 20S, 4S, 8S, 9, 10S, 16S, 12S, 7, 25S, 10x14

Film

Film widths up to 22 in.
3 roll capacity

Configuration

Exit right standard
Exit left optional
Straight-through optional

System weight

200 lb.

Operating Range

40°F–95°F (5°C–35°C)

PLU Presets

Unlimited

Label Sizes

(Auto Application)

1.1 in.–4.2 in. length
1.4 in.–3.1 in. width

Labeler Options

Single printer applicator

Electrical

120 VAC
60Hz, Single Phase

Controller

Embedded Linux OS
Windows 10 optional


Network Interface

Wired ethernet
Wireless upgrade available

Display/Keyboard

Color LED touchscreen

Dimensions in inches

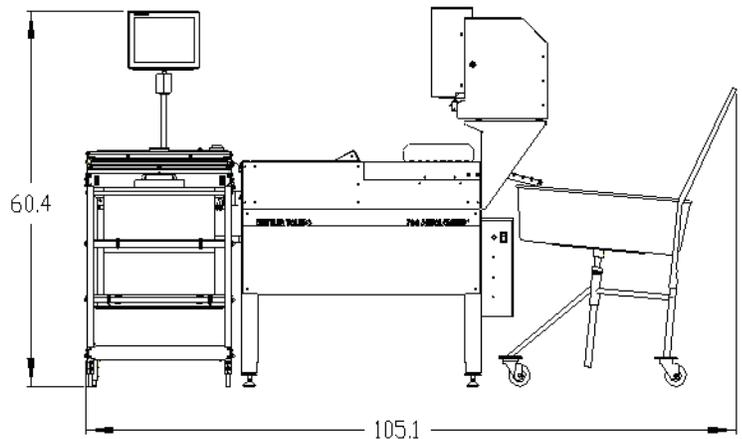

www.mt.com/retail

For more information



ISO 9001 quality management certification
ISO 14001 environmental management certification

Subject to technical changes.
© 9/2017 Mettler-Toledo, LLC
Printed in USA RDB029.0E
Global MarCom Switzerland

