

Project \_\_\_\_\_

Item Number \_\_\_\_\_

Quantity \_\_\_\_\_

SL160RB/SL200RB



## SL160RB / SL200RB SILVERLINE Spiral Mixers with Removable Bowl

### Models:

- SL160RB: 243 quart (230 Liter) Spiral Mixer
- SL200RB: 306 quart (290 Liter) Spiral Mixer



Spiral Mixer  
with Removable Bowl

### Features:

- Stainless steel bowl, spiral dough hook, and shaft
- Separate bowl and agitator motors
- Has two speeds and reverse function
- Control board has separate timers for 1st and 2nd speed
- Safety switches protect operator from injury if bowl lid is open
- Powerful belt drive provides low vibration, low noise, and economical maintenance for years of reliable service

### Standard Accessories:

- Stainless steel bowl
- Dolly with bowl for 160 or 200 depending on machine
- Electromagnetic hook for bowl

### Optional Accessories:

- Extra dolly with bowl

Univex Corporation

### Dough Capacity:

SL160RB: 350lb (160kg)  
SL200RB: 440lb (200kg)

### Dough Hook:

1st speed: 95 rpm  
2nd speed: 190 rpm

### Bowl:

20 rpm

### Warranty:


- One year, on-site parts and labor



WE RAISE THE BAR. WE SET THE STANDARD.

**SILVERLINE Spiral Mixer with Removable Bowl**

**SL160RB / SL200RB**

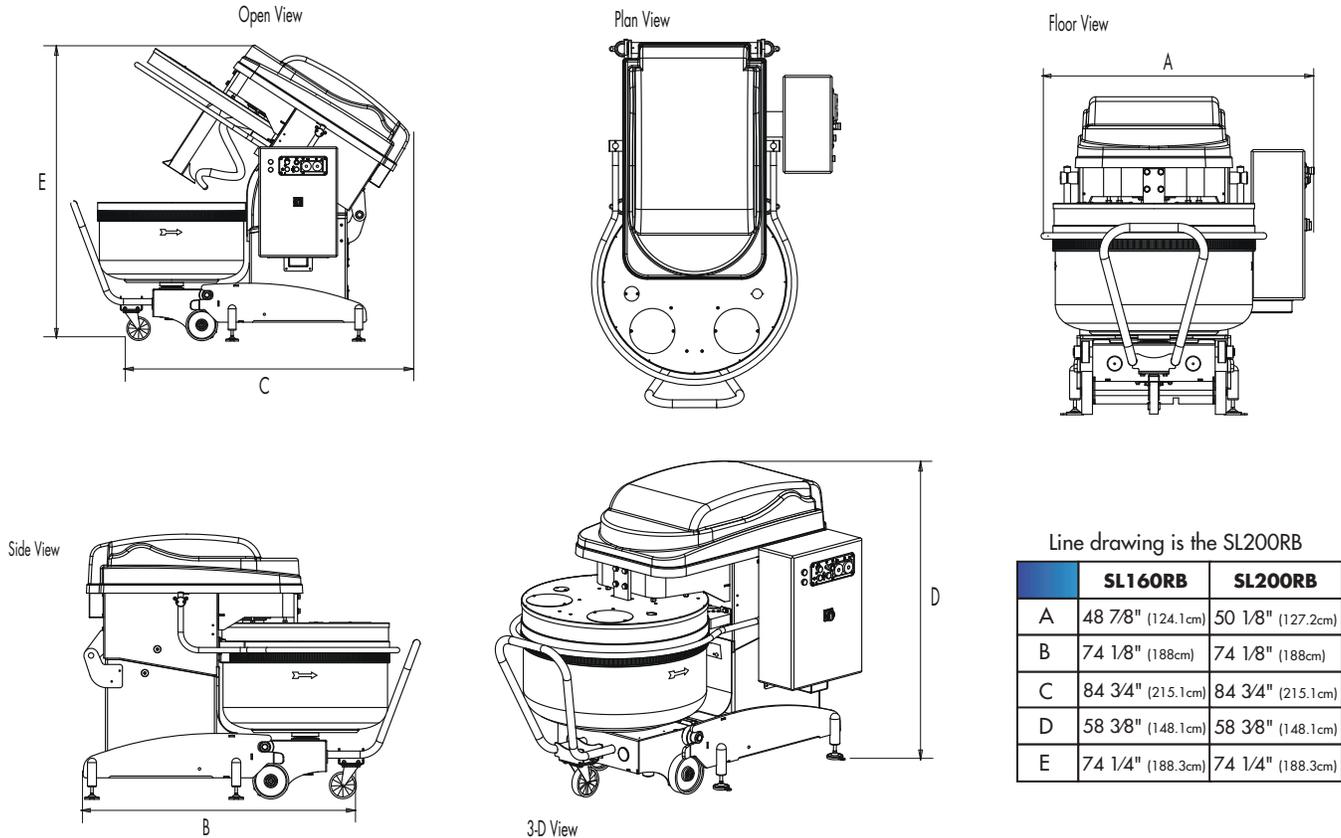

Line drawing is the SL200RB

	SL160RB	SL200RB
A	48 7/8" (124.1cm)	50 1/8" (127.2cm)
B	74 1/8" (188cm)	74 1/8" (188cm)
C	84 3/4" (215.1cm)	84 3/4" (215.1cm)
D	58 3/8" (148.1cm)	58 3/8" (148.1cm)
E	74 1/4" (188.3cm)	74 1/4" (188.3cm)

**Transmission:** Heavy duty low noise and low vibration belt drive.

**Bowl Guard:** Swings open for full access to bowl. Guard must be closed for mixer operation.

**Controls:** Control panel with digital timers. Separate timers for high and low speed. Security key for manual use. Bowl reverse direction switch.

**Plug:** Hardwire with Shutoff

**True 3 phase power is required, Delta or other semi 3 phase power set up 's will not work**

Electrical Information (60Hz)										
Model	Voltage	Phase	Spiral hp(kW)	Bowl hp(kW)	Head hp(kW)	Total hp(kW)	Spiral Amps	Bowl Amps	Head Amps	Total Amps
SL160RB	220	3	19.2 (14.4)	1 (.75)	1 (.75)	21.2 (15.9)	61.6	4.48	4.48	70.56
SL160RB Optional Voltage	400	3	19.2 (14.4)	1 (.75)	1 (.75)	21.2 (15.9)	30.8	2.24	2.24	33.04
SL200RB	220	3	19.2 (14.4)	1 (.75)	1 (.75)	21.2 (15.9)	61.6	4.48	4.48	70.56
SL200RB Optional Voltage	400	3	19.2 (14.4)	1 (.75)	1 (.75)	21.2 (15.9)	30.8	2.24	2.24	33.04

**Shipping Information**

Model	Net Weight	Shipping Weight	Overall Dimensions
SL160RB	2,161 lbs. (980Kg)	2,350 lbs. (1,065.9Kg)	68" (172.7cm) H x 88" (223.5cm) W x 66" (167.6cm) D
SL200RB	2,403 lbs. (1,090Kg)	2,460 lbs. (1,115.8Kg)	68" (172.7cm) H x 88" (223.5cm) W x 66" (167.6cm) D

\*The weight and dimensions of the pallet are included in the weight and dimensions above.



**Univex Corporation**  
www.Univexcorp.com

3 Old Rockingham Rd  
Salem, NH 03079  
United States of America

INTL TEL: (800)258-6358  
TEL: (603)893-6191  
INTL FAX: (800)356-5614  
FAX: (603)893-1249